

MEDIUM WHEELBASE

# FIGHTER FK1125

4x2 • AUTOMATIC OR MANUAL



**GVM:**  
11,000kg



**Power / Torque:**  
184kW / 761Nm



**Wheelbase:**  
5,210mm (L) / 5,540mm (M)

- 30,000km service intervals
- Full air brakes
- Isringhausen driver's seat
- Low-height chassis

# SPECIFICATIONS - FIGHTER FK1125

## MODEL

4x2 FK1125	6 SP.	MAN	STEEL SUSP.	FK62FLY1RFAC
4x2 FK1125	5 SP.	AUTO	STEEL SUSP.	FK62FLY1RFAL
4x2 FK1125	6 SP.	MAN	STEEL SUSP.	FK62FMY1RFAC

## WHEELBASE (mm)

5,210 (L)
5,210 (L)
5,540 (M)

## GVM (kg)

11,000
11,000
11,000

## GCM (kg)


20,000
15,000
20,000

## ENGINE

Engine Version	FUSO 6M60-9AT1 Diesel
Configuration	6 Cyl. In-line OHC, 4-Valve
Type	Variable Geometry Turbo Charged Air to Air Intercooler
Displacement	7.5 litre (7,545cc)
Power ECE Nett	177kW @ 2500rpm
Torque ECE Nett	745Nm @ 1400rpm
Power (JIS Gross)*	184kW (250ps)@ 2500rpm
Torque (JIS Gross)*	761Nm (561lb/ft) @ 1400rpm
Maximum Engine Speed (rpm)	2900
Compression Ratio	16.0:1
Cooling System/Oil Cooler	Water cooled with Viscous fan, 23.0L capacity. Engine oil cooler
Air Cleaner	Paper Element Type with Restrictor Indicator. Vertical Intake Mounted on Clean Air Side (RH)
Cold Start Preheat	Standard
Emission Control	Selective Catalytic Reduction (SCR) after-treatment system (BlueTec), Positive Crankcase Ventilation (PCV)
Emission Level	EURO 5 (ADR 80/03)

\*Calculated

## 6M60-9AT1

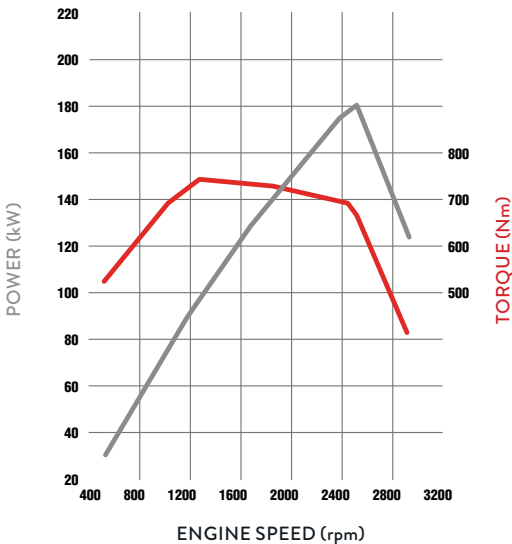

## FUEL

Injection System	DENSO Common Rail System Electronically Controlled Direct Injection
Tank Type	Rectangular Steel Tank with Locking Cap
Fuel Capacity (L)	200
AdBlue Exhaust Fluid Capacity (L)	25

## ELECTRICAL (continued)

Voltage	24V Negative Earth
Alternator Capacity	24V-80 amp
Battery Specification	Heavy Duty 2 x 12V, 100Ah/20hr
Headlamp Type	Halogen 2 x 70W/75W

## CLUTCH

	Manual
Clutch Model	FUSO C7M38
Type	Single Plate Cerametallic 380mm
Operation/Specification	Air Assisted Hydraulic

## TRANSMISSION

	Manual	Automatic
Version	FUSO Manual M070S6-OD	
Type/Speeds	6 with Air Assisted Gearshift	5 Speed with Power / Economy Mode
Features	Synchromesh 2nd-6th	Generation 5 Control Systems
Ratios	1st: 6.807 2nd: 4.172 3rd: 2.396 4th: 1.504 5th: 1.000 6th: 0.774 Rev. 6.807	1st: 3.512 2nd: 1.896 3rd: 1.439 4th: 1.000 5th: 0.737 Rev. 5.086
PTO Opening	LH Side	LH & RH Side
Torque Converter/ Stall Torque Ratio	N/A	TC222/1.58
Automatic Transmission Fluid Cooling	N/A	Cooler mounted in front of radiator

## PROPELLER SHAFT

	Manual	Automatic
Type	P10	P8
Universal Joint	Needle Roller	

## FRONT AXLE

Axle	FUSO F500T "I" Beam
Design Capacity (kg)	5,000
Max Operating Capacity (kg)	4,480

## FRONT SUSPENSION

Type	Taper Leaf spring with Stabiliser Bar and Double Acting Shock Absorbers
Size (mm)	1,300 x 70

## REAR AXLE

Axle	FUSO D052 Full Floating Hypoid
Design Capacity (kg)	9,500
Max Operating Capacity (kg)	8,480
Ratio	Manual: 4.625:1    Auto: 4.875:1

# SPECIFICATIONS - FIGHTER FK1125

## REAR SUSPENSION

Type	Steel Suspension
Details	Multi Leaf spring with Stabiliser Bar
Size Main Leaves (mm)	1,300 x 70
Size Helper Leaves (mm)	900 x 70

## STEERING

Power Assisted	Tilt/Telescopic Adjustable Steering Wheel
----------------	-------------------------------------------

## BRAKES

Type	Full Air, Dual Circuit, FUSO Taper Roller, Automatic Brake adjustment, ABS
ASR (Traction Control)	Yes (Not available on auto model)
Size Front / Rear (mm)	370 x 150
Park Brake	Rear Wheel Spring Actuated
Auxiliary	Exhaust Brake
Compressor	Water Cooled, 340cc Single Cylinder with air dryer

## WHEELS AND TYRES

Wheel Type	7, Single Piece Disc
Wheel Size	19.5 x 6.75DC-147-13t
Wheel Stud Pattern	8 Stud 275mm PCD ISO
Tyre Size All	245/70R19.5
Spare Tyre Carrier	Provided

## CHASSIS

Type	Parallel Channel
Size (mm)	230 x 80 x 7.0
Width (mm)	844

Refer to the bodybuilders guidelines on the Fuso website ([www.fuso.co.nz](http://www.fuso.co.nz)) before mounting a body or modifying the chassis

## INSTRUMENTS

Gauges	Speedometer with Odometer Tachometer Air Pressure (2) Fuel Level Water Temperature
Colour Information Display	Fuel Consumption Service Indicators Hour Meter and Tripmeter

## STANDARD FEATURES

Airbag	Driver's Air Bag and Seat Belt Pre-tensioners
Hill Start System	Yes (Not available on auto model)
Cab Cooling and Heating	Air Conditioner/Heater/Demister
Accessory Power	24V Accessory Power Outlet/Cigar Lighter
Driving	Keyless Central Locking Electric Windows Cruise Control

## STANDARD FEATURES (continued)

Driving	LH Transom Window AM/FM CD + USB + AUX + Bluetooth Hands Free Cup Holders (4) Rear Quarter Glass Fluorescent Cabin Lamp and Interior Reading Lamps Engine Idle Speed Control
Storage	Centre Seat Storage Console Rear Bunk Storage Pocket Dash Storage Tray 2 DIN Glove Compartment 1 Single and 1 Double DIN Slot for Accessories Overhead Storage Pocket with Lid RH Door Storage Pocket
Cab: External	Roof Mounting Points (max. static load 70kg) Front End-Outline Marker Lamps
Chassis	Mounted Tool Box, Reverse Warning Buzzer

## CAB FEATURES

Type	All Steel Forward Control, Manual Tilt 44 deg.
Mounting	Hydroelastic Susp. 4 Point
Colour	Natural White (W31)
Interior	Fully Trimmed
Windscreen	Laminated Tinted
Windscreen Wipers	2 Speed + Intermittent Cycle with Integrated Washer Nozzles
Door	90 degree Opening Angle
Rear Vision Mirrors	Remote/Heated with Convex Spotter (Both Sides)
Seating Capacity	3
Seat Belts	2 ELR Lap Sash, 1 Lap
Seat (driver)	ISRI Air Suspension with Auto Levelling, Height, Tilt and Dampening Adjustment Integral Headrest and Fabric Trim
Seats (passenger)	Centre: Low Back with Fabric Trim and forward folding LH Passenger: Fixed Base with Reclining Seat Back, Integral Headrest and Fabric Trim

## SERVICE INTERVALS

Please contact your nearest FUSO dealer for details

## WARRANTY

36 months or 150,000km (whichever occurs sooner)  
Subject to terms and conditions in the FUSO Warranty Booklet

## PERFORMANCE

	Manual	Automatic
Turning Circle (kerb to kerb - metres)	L = 18.2 M = 19.4	18.2
Road Speed (km/h) at Max Engine Speed	124	123
Engine Speed (rpm) at 90km/hr (top gear)	2,050	2,045
Gradeability at Rated GVM (theoretical)*	51%	39%
Gradeability at Rated GCM (theoretical)*	25%	27%

*\*This is theoretical performance only. Actual performance may vary under different conditions*

## KERB WEIGHTS AND MAX AXLE LOADS (kg)

Model		Vehicle Ratings**		Max Axle Loadings**		Kerb Weights*		
		GVM	GCM	Front	Rear	Front	Rear	Total
4x2 FK1125 6 Sp. Man Steel Susp.	FK62FLY1RFAC	11,000	20,000	4,480	8,480	2,330	1,430	3,760
4x2 FK1125 5 Sp. Auto Steel Susp.	FK62FLY1RFAL	11,000	15,000	4,480	8,480	2,370	1,430	3,800
4x2 FK1125 6 Sp. Man Steel Susp.	FK62FMY1RFAC	11,000	20,000	4,480	8,480	2,330	1,450	3,780

\* Weights (est.) includes 10L fuel and spare wheel and are subject to 2.5% variation (+/-)

\*\* Vehicle ratings and max axle loadings may be limited by local regulations.


# SPECIFICATIONS - FIGHTER FK1125

## DIMENSIONS (mm)


	L Wheelbase	M Wheelbase
Wheelbase	5,210	5,540
Length Overall	8,645	9,075
Height Overall	2,480	2,480
Width Overall	2,255	2,255
Width Rear Axle	2,255	2,255

## DIMENSIONS (mm) (continued)

	L Wheelbase	M Wheelbase
Width Front Track	1,780	1,780
Width Rear Track	1,710	1,710
Width Frame	844	844
Height Frame at Rear Axle	920	920

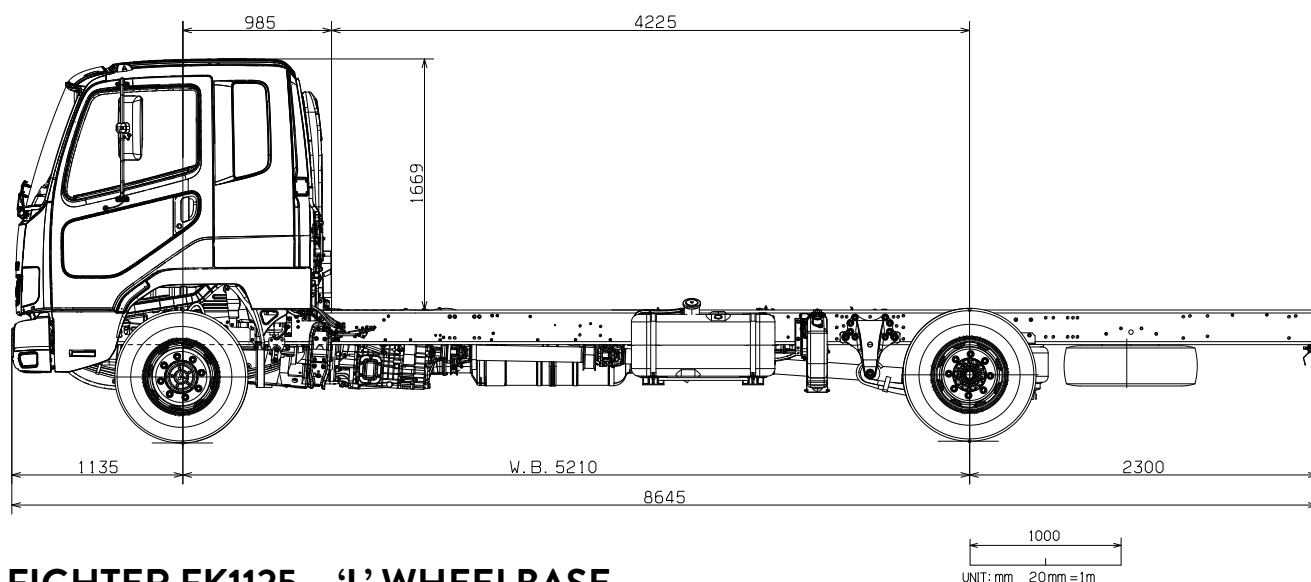

**FIGHTER FK1125 – ‘L’ WHEELBASE**

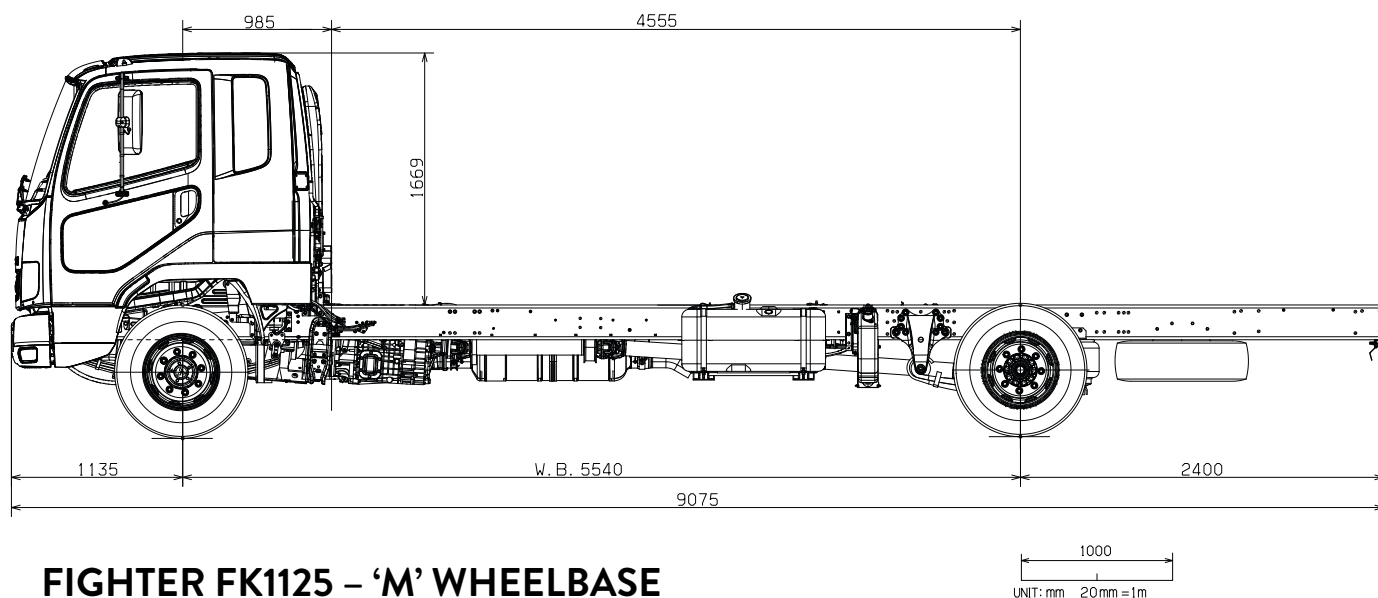

**FIGHTER FK1125 – ‘M’ WHEELBASE**

Scale = 1:50 (20mm = 1 metre). This scale is accurate when used on the original spec sheet, be aware that enlarging these illustrations can alter the scale and cause incorrect measurements. Fuso New Zealand and its authorised dealers always recommend customers seek professional advice from independent sources before commencing any engineering activities.

A policy of continual improvement means that specifications detailed in this brochure are subject to change without notice. Contact your authorised Fuso dealer to confirm current specifications. Fuso is a registered trademark of Mitsubishi Fuso Truck & Bus Corporation. Copyright © Fuso NZ (2019)